


ULIC G LED

- Strahler auf 3-Phasen-Universaladapter aus Aluminiumdruckguß
- Philips Chip Fortimo SLM Gen.5, Food Bäckerei, oder Food Metzgerei
- Pulverbeschichtet in weiß, schwarz, silber sowie RAL auf Anfrage
- Hocheffiziente Reflektoren aus 99,9 % Reinstaluminium wahlweise in 16, 24, 36 oder 60°
- Bajonettfrontring mit klarem Schutzglas für werkzeuglosen Reflektorwechsel, das Schutzglas schützt Chip und Reflektor vor Verunreinigungen
- Inkl. Standarttreiber, dimmbare Treiber auf Anfrage
- PASSIVE Kühlung
- 350° dreh- und 2 x 90° schwenkbar sowie 2 x 40° in der Schienenachse
- Gewicht NUR 1,45 kg

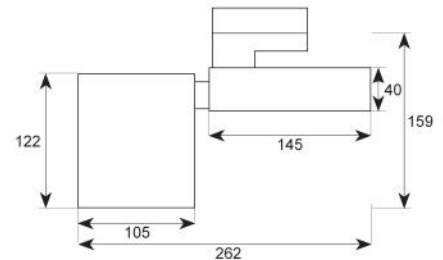

- Projector with 3-phase-uniaadapter made out of aluminium-diecast
- Philips Chip Fortimo SLM Gen.5, Food Bäckerei or Metzgerei
- Powderpainted in white, black, silver or in RAL upon demand
- High efficient reflectors out of extra pure aluminium 99,9 % optionally with beamangle 16, 24, 36 or 60°
- Twist & look frontring for change of glass & reflectors without any tools, the clear glass protects chip & reflector from dust & dirt
- Incl. standartdriver, dimmable driver upon demand
- PASSIVE cooling
- 350° turnable & 2 x 90° adjustable plus 2 x 40°
- Weight 1,45 kg ONLY!

Fortimo SLM Gen.5 LES 19mm 25-33 W

830	3.000 K	RA 80	3.420 - 4.160 Lumen
835	3.500 K	RA 80	3.540 - 4.340 Lumen
840	4.000 K	RA 80	3.650 - 4.480 Lumen
927	2.700 K	RA 90	2.820 - 3.460 Lumen
930	3.000 K	RA 90	2.970 - 3.620 Lumen

Fortimo SLM Gen.4 FOOD LES 19mm 25-33 W WARM WHITE

1.560 - 1.790 Lumen 2.400 K

Food Spezial Metzgerei

1.290 - 1.500 Lumen

CE IP 20

220 - 240 V
50 - 60 Hz



2072

16°	2072-_-16
24°	2072-_-24
36°	2072-_-36
60°	2072-_-60